



2 | Rollers



2.6.1 - Impact rollers

Impact rollers are used and positioned corresponding to the load points, where the lumps and the weight of material falling onto the belt could in fact cause damage to it.

To limit the impact effect of the material onto the rollers, the latter are covered with a series of rubber rings of adequate thickness and resistance.

Impact rollers are under stress not only from the load of the material, but also from the dynamic forces as the load falls onto the belt.

The impact onto the belt, arising from the free fall of material (Fig.6) will be naturally greater than in the case where the material is deflected onto the belt by an inclined plate (Fig.7).

For the correct dimensioning and the choice of impact rollers in relation to the load check the characteristics of the base roller.

Fig. 6


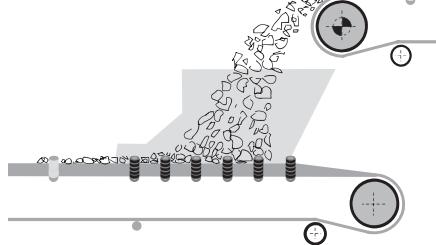



Fig. 7

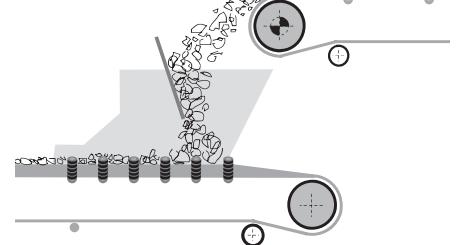

Programme of production of impact rollers

basic roller type	D mm	Øe mm	design	spindle d	ch	bearing
MPS/1	60	3	89 NA	15	17	6202
	60	3	108 NA			
PSV/1-FHD	63	3	89 NA	20	14	6204
	63	3	108 NA			
	89	3	133 NA			
	89	3	159 NA			
PSV/2-FHD	89	3	133 NA	25	18	6205
	89	3	159 NA			
PSV/3-FHD	89	3	133 NA	25	18	6305
	89	3	159 NA			
PSV/4-FHD	89	3	133 NA	30	22	6206
	89	3	159 NA			
PSV/5-FHD	89	4	133 NA	30	22	6306
	89	4	159 NA			
	108	4	180 NA			
	133	4	194 NA			
	133	4	215 NA			
PSV/7-FHD	108	4	180 NA	40	32	6308
	133	6	194 NA			
	133	6	215 NA			

The table indicates the types and diameters of standard rings and dimensions according to European norms.
On request special diameters and tube thicknesses may be supplied.

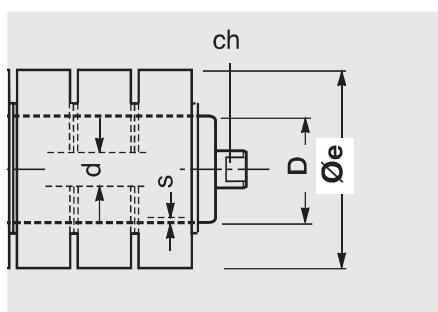




2 Rollers

series

Impact

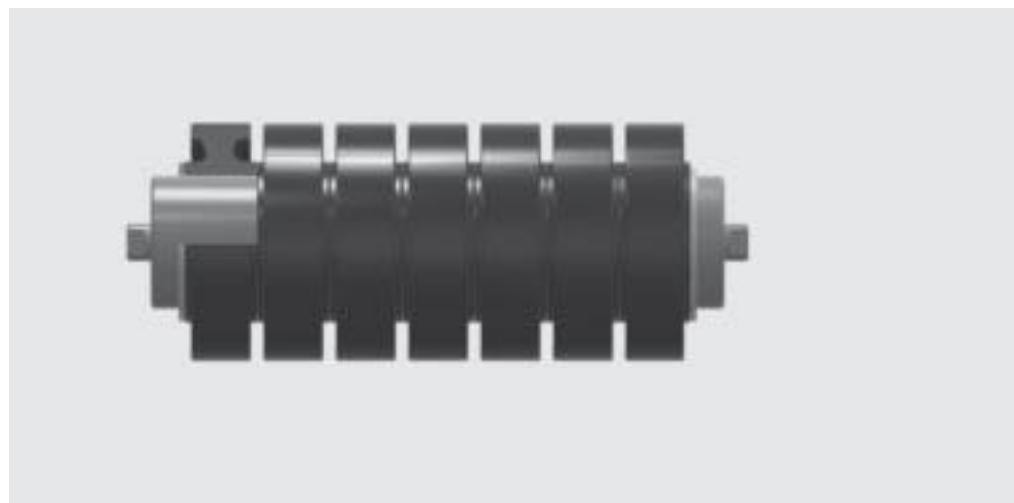

Øe 89 NA

Base roller:

MPS/1

D = 60;
spindle 15; d₁ = 20
bearing 6202
ch = 17


PSV/1-FHD

D = 63;
spindle 20; d₁ = 20
bearing 6204
ch = 14

belt	roller					
width mm	dimensions mm			weight Kg		rings width
arrangements	B	C	A	MPS/1-FHD	PSV/1-FHD	E = 35
	400	160	168	186	1.8	2.3
	300	200	208	226	2.1	2.7
	400	250	258	276	2.6	3.3
	500	315	323	341	3.3	4.1
	300	380	388	406	3.9	4.8
	800	465	473	491	4.6	5.6
	400	500	508	526	5.1	6.1
	1400	530	538	556		6.4
	500	600	608	626	6.1	7.2
	1200	700	708	726	6.9	8.1
	650	750	758	776	7.4	8.8
	1400	800	808	826		9.2
	800	950	958	976	9.3	10.9
	1000	1150	1158	1176	11.1	12.9
	1200	1400	1408	1426	13.5	15.7
	1400	1600	1608	1626		17.9

Example of ordering
standard design
MPS/1,15B,89NA,323

for special designs
see pages 80-81

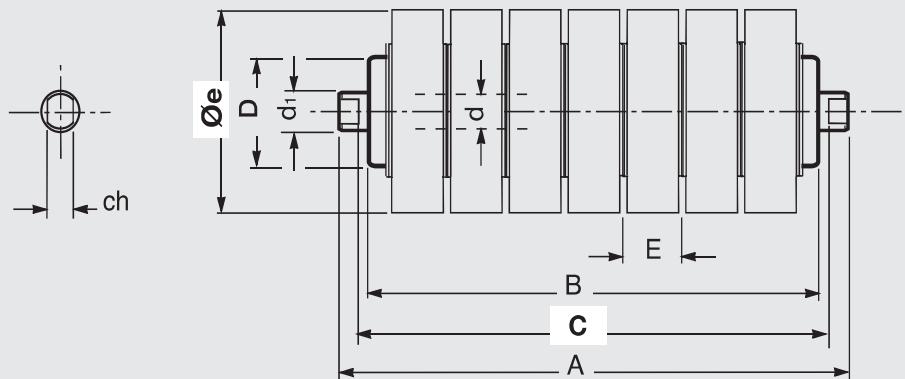

Øe 108 NA

Base roller:

MPS/1

D = 60;
spindle 15; d₁ = 20
bearing 6202
ch = 17

PSV/1-FHD

D = 63;
spindle 20; d₁ = 20
bearing 6204
ch = 14

width mm	belt			roller			rings width
	dimensions mm			weight Kg			
arrangements	B	C	A	MPS/1-FHD	PSV/1-FHD	E = 45	
 400	160	168	186	2.1	2.6		
300 500	200	208	226	2.6	3.2		
400 650	250	258	276	3.1	3.8		
500 800	315	323	341	4.0	4.8		
300 650 1000	380	388	406	4.6	5.5		
800 1200	465	473	491	5.7	6.6		
400	500	508	526	6.1	7.1		
	1400	530	538	556	7.3		
500 1000	600	608	626	7.5	8.6		
1200	700	708	726	8.6	9.9		
650	750	758	776	9.2	10.5		
1400	800	808	826		11.1		
800	950	958	976	11.6	13.2		
1000	1150	1158	1176	13.8	15.7		
1200	1400	1408	1426	16.6	18.8		
1400	1600	1608	1626		21.5		

Example of ordering

standard design
PSV/1-FHD, 20F, 108NA, 323


for special designs
see pages 80-81



2 Rollers

series

Impact

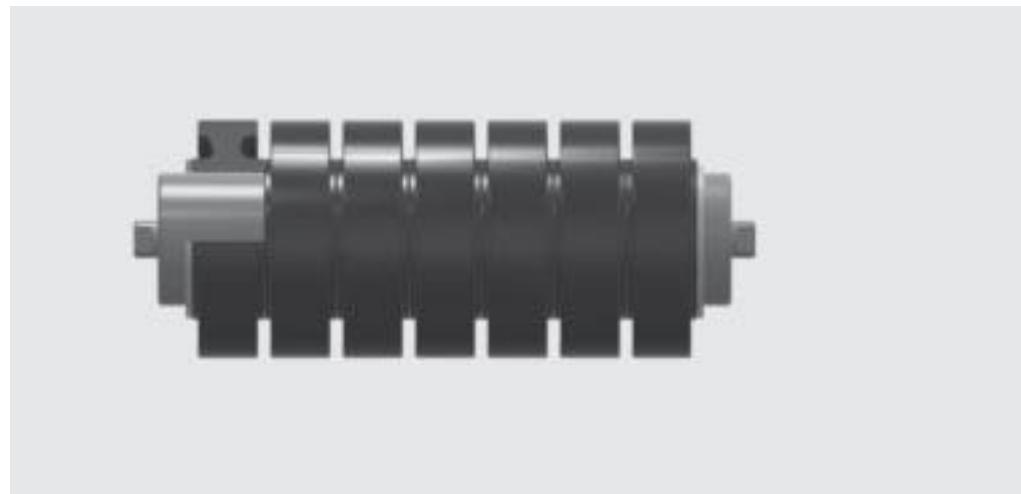

Øe 133 NA

Base roller:

PSV/1-FHD

D = 89;
spindle 20; d₁ = 20
bearing 6204
ch = 14

PSV/4-FHD

D = 89;
spindle 30; d₁ = 30
bearing 6206
ch = 22

PSV/2-FHD

D = 89;
spindle 25; d₁ = 25
bearing 6205
ch = 18

PSV/5-FHD

D = 89 x 4*;
spindle 30; d₁ = 30
bearing 6306
ch = 22

PSV/3-FHD

D = 89;
spindle 25; d₁ = 25
bearing 6305
ch = 18


* biggertubethickness
than standard

Example of ordering
standard design
PSV/2-FHD,25F,133NA,388

for special designs
see pages 80-81

belt	roller								
width mm	dimensions mm			weight Kg				rings width	
arrangements	B	C	A	PSV/1-FHD	PSV/2-FHD	PSV/3-FHD	PSV/4-FHD	PSV/5-FHD	E = 35
	500	200	208	*	3.7				
	650	250	258	*	4.5	5.1			
	500 800	315	323	*	5.6	6.2	6.5	7.3	7.9
	650 1000	380	388	*	6.6	7.3	7.7	8.5	9.1
	800 1200	465	473	*	7.8	8.6	8.9	9.9	10.5
	1400	530	538	*	8.8	9.7	10.1	11.2	11.8
	500 1000 1600	600	608	*	10.1	11.1	11.4	12.7	13.3
	1800	670	678	*		12.2	12.6	13.9	14.5
	1200	700	708	*	11.4	12.6	12.9	14.3	14.9
	650 2000	750	758	*	12.3	13.5	13.9	15.3	15.9
	1400	800	808	*	12.9	14.2	14.6	16.2	16.4
	1600	900	908	*	14.5	15.9	16.3	18.0	18.6
	800	950	958	*	14.6	17.1	17.5	19.3	19.9
	1800	1000	1008	*		18.2	18.4	20.1	20.7
	2000	1100	1108	*			19.8	21.7	22.3
	1000	1150	1158	*	18.7	20.5	20.8	23.0	23.6
	1200	1400	1408	*	22.4	24.6	24.9	27.5	28.1
	1400	1600	1608	*	25.5	27.9	28.3	31.2	31.8
	1600	1800	1808	*	28.0	30.7	31.0	34.3	34.9
	1800	2000	2008	*		34.0	34.4	38.0	38.6
	2000	2200	2208	*			37.5	41.5	42.1

* in relation to the choice of base roller

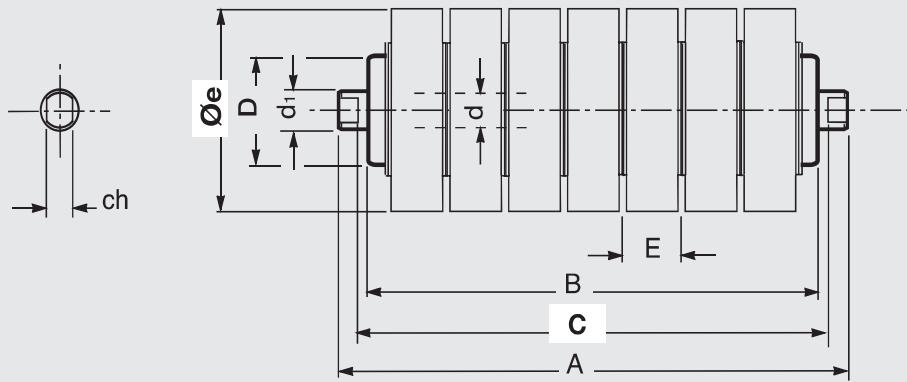

Øe 159 NA

Base roller:

PSV/1-FHD

D = 89;
spindle 20; d₁ = 20
bearing 6204
ch = 14

PSV/2-FHD

D = 89;
spindle 25; d₁ = 25
bearing 6205
ch = 18

PSV/3-FHD

D = 89;
spindle 25; d₁ = 25
bearing 6305
ch = 18

* biggertubethickness
than standard

belt	roller					rings width			
	width mm	dimensions mm			weight Kg				
arrangements	B	C	A	PSV/1-FHD	PSV/2-FHD	PSV/3-FHD	PSV/4-FHD	PSV/5-FHD	E = 50
	800	315	323	*	7.3	7.9	8.2	9.0	9.0
	1000	380	388	*	8.4	9.2	9.5	10.4	11.0
	800 1200	465	473	*	10.4	11.3	11.6	12.6	12.2
	1400	530	538	*	11.6	12.5	12.9	14.0	14.6
	1000 1600	600	608	*	13.4	14.5	14.8	16.1	16.7
	1800	670	678	*		15.8	16.2	17.5	18.1
	1200	700	708	*	15.5	16.7	17.1	18.5	19.1
	2000	750	758	*	16.6	17.8	18.2	19.7	20.3
	1400	800	808	*	17.7	19.0	19.3	20.9	21.5
	1600	900	908	*	19.8	21.2	21.6	23.3	23.9
	800	950	958	*	20.6	22.3	22.7	24.5	25.1
	1800	1000	1008	*		23.4	23.8	25.7	26.3
	2000	1100	1108	*		26.0	28.1	28.7	
	1000	1150	1158	*	25.0	26.8	27.2	29.3	29.9
	1200	1400	1408	*	30.3	32.4	32.8	35.4	36.0
	1400	1600	1608	*	35.1	37.5	37.9	40.8	41.4
	1600	1800	1808	*	39.3	42.0	42.4	45.6	46.2
	1800	2000	2008	*		46.5	46.9	50.5	51.1
	2000	2200	2208	*		51.3	55.3	59.9	

* in relation to the choice of base roller

Example of ordering
standard design
PSV/4-FHD,30F,159NA,473


for special designs
see pages 80-81



2 Rollers

series

Impact

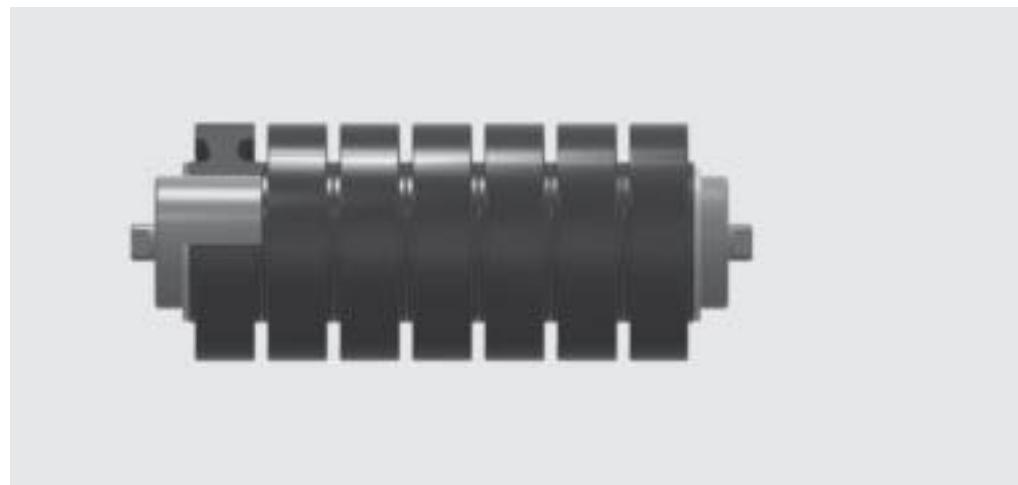

Øe 180 NA

Base roller:

PSV/5-FHD

D = 108 x 4*;
spindle 30; d₁ = 30
bearing 6306
ch = 22

PSV/7-FHD


D = 108 x 4*;
spindle 40; d₁ = 40
bearing 6308
ch = 32

* bigger tube
thickness than
standard

belt	roller					
width mm	dimensions mm			weight Kg		rings width
arrangements	B	C	A	PSV/5-FHD	PSV/7-FHD	E = 40
	1600	600	608	632	20.1	25.3
	1800	670	678	702	22.5	28.1
	2000	750	758	782	24.9	30.8
	2200	800	808	832	26.9	33.0
	1600	2400	900	908	932	29.7
		2600	950	958	982	31.7
		1800	1000	1008	1032	33.1
		2800	1050	1058	1082	34.4
		2000	1100	1108	1132	36.4
		3000	1120	1128	1152	36.7
		2200	1250	1258	1282	41.2
		2400	1400	1408	1432	45.9
		2600	1500	1508	1532	48.7
		2800	1600	1608	1632	52.1
	1600		1800	1808	1832	58.2
	1800		2000	2008	2032	64.9
	2000		2200	2208	2232	71.1
	2200		2500	2508	2532	80.6
	2400		2800	2808	2832	90.1
	2600		3000	3008	3032	96.2
	2800		3150	3158	3182	100.9
						116.3

Example of ordering
standard design
PSV/5-FHD,30F,180NA,678

for special designs
see pages 80-81

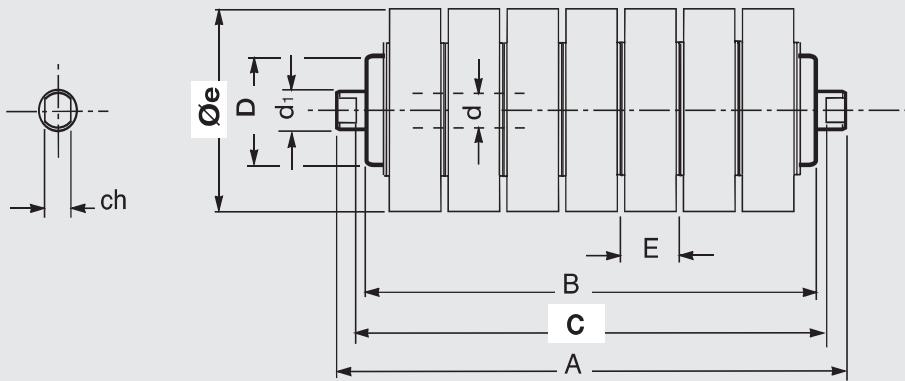

Øe 194 NA

Base roller:

PSV/5-FHD

D = 133;
spindle 30; d₁ = 30
bearing 6306
ch = 22

PSV/7-FHD

D = 133 x 6*;
spindle 40; d₁ = 4
bearing 6308
ch = 32

* bigger tube
thickness than
standard

Example of ordering
standard design
PSV/5-FHD,30F,194NA,678

for special designs
see pages 80-81


belt width mm	roller						rings width	
	dimensions mm			weight Kg				
arrangements	B	C	A	PSV/5-FHD	PSV/7-FHD	E = 50	E = 50	
	1600	600	608	632	23.4	28.1		
	1800	670	678	702	25.5	30.5		
	2000	750	758	782	28.6	34.0		
	2200	800	808	832	30.3	35.9		
	1600	2400	900	908	932	33.8	39.8	
	2600	950	958	982	35.5	41.8		
	1800		1000	1008	1032	37.2	43.7	
	2800	1050	1058	1082	39.0	45.7		
	2000		1100	1108	1132	40.7	47.6	
	3000	1120	1128	1152	41.1	48.1		
	2200		1250	1258	1282	45.9	53.5	
	2400		1400	1408	1432	51.1	59.3	
	2600		1500	1508	1532	54.6	63.2	
	2800		1600	1608	1632	58.1	66.9	
	1600		1800	1808	1832	65.0	74.9	
	1800		2000	2008	2032	71.9	82.7	
	2000		2200	2208	2232	78.9	90.5	
	2200		2500	2508	2532	89.3	102.2	
	2400		2800	2808	2832	99.7	113.9	
	2600		3000	3008	3032	106.6	121.7	
	2800		3150	3158	3182	111.8	127.5	



2 Rollers

series

Impact

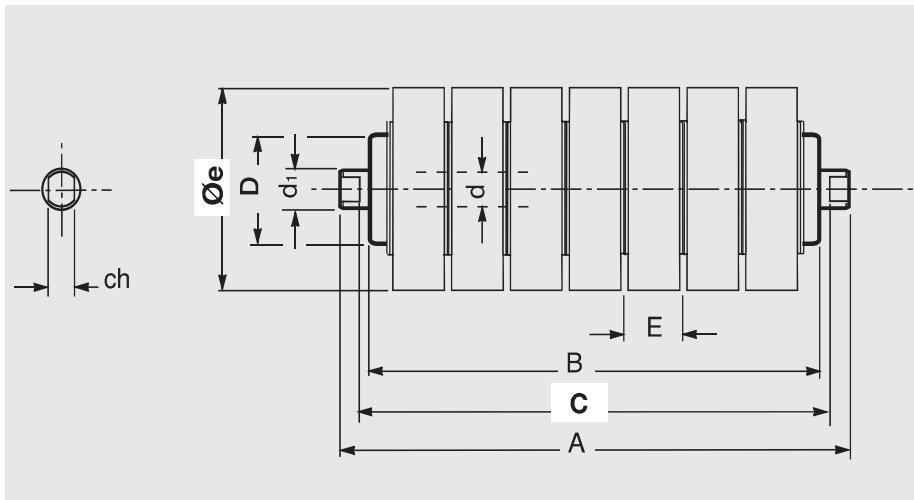

Øe 215 NA

Base roller:

PSV/5-FHD

D = 133;
spindle 30; d₁ = 30
bearing 6306
ch = 22

PSV/7-FHD

D = 133x 6*;
spindle 40; d₁ = 40
bearing 6308
ch = 32

* bigger tube
thickness than
standard

belt	roller				
width mm	dimensions mm			weight Kg	
arrangements	B	C	A	PSV/5-FHD	PSV/7-FHD
					E = 50
1800	670	678	702	27.6	32.6
2000	750	758	782	31.0	36.4
2200	800	808	832	32.9	38.5
2400	900	908	932	36.7	42.7
2600	950	958	982	38.6	44.8
1800	1000	1008	1032	40.4	46.9
2800	1050	1058	1082	42.3	49.0
2000	1100	1108	1132	44.2	51.1
3000	1120	1128	1152	44.6	51.6
2200	1250	1258	1282	49.9	57.5
2400	1400	1408	1432	55.6	63.8
2600	1500	1508	1532	59.4	68.0
2800	1600	1608	1632	63.2	72.2
1800	2000	2008	2032	78.3	89.1
2000	2200	2208	2232	85.9	97.5
2200	2500	2508	2532	97.3	110.2
2400	2800	2808	2832	108.6	122.8
2600	3000	3008	3032	116.2	131.3
2800	3150	3158	3182	121.9	137.6

Example of ordering
standard design
PSV/7-FHD,40F,215NA,758

for special designs
see pages 80-81